



# ELECTRIC DRINKING FOUNTAIN

## A152.8-SO Series

### MODEL A1524080S-SO

BARRIER FREE, BI-LEVEL, SENSOR OPERATED  
WALL MOUNTED ELECTRIC DRINKING FOUNTAIN  
WITH 32" TRIM PANEL

#### STANDARD FEATURES

- Child or Adult ADA Compliant (when properly installed)
- 18 gage, 304 stainless steel
- Polished stainless steel, anti-rotation, non-squirt bubbler
- 100 mesh inlet strainer
- Vandal resistant screws
- P-trap
- Mounting frame
- 32 inch trim panel

#### SUGGESTED SPECIFICATIONS

Model A152408S-SO is a wall mounted, bi-level pressurized electric drinking fountain that shall deliver a minimum of **8.0 GPH** (30.3 LPH) of water at 50°F (10°C) cooled from 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient. Unit shall be made from 18 gage, 304 stainless steel with a brushed finish and customer has to supply power for a 115 volt transformer. Lower unit shall be activated by a front mounted infrared sensor. Upper unit shall be actuated from front push bar using less than 5 pounds of force. Cooling system shall use R-134a refrigerant and be capillary tube regulated. An adjustable thermostat with an off position shall regulate the refrigeration system. Bubblers shall be polished stainless steel with non-squirt features and operate on a water pressure range of 20-105 psig. Unit shall have uniquely designed, two-piece contoured bowls with P-traps integral to the unit. Unit shall be listed by Underwriters Laboratories for both the US and Canada and is compliant to the Air Conditioning and Refrigeration Institute Standard 1010. Unit is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.

Model Number	GPH*	Rated Watts	Full Load Amps	Approx. Shipping Weight
A152408S-SO	8.0	390	4.6	130 lbs.

\*GPH of 50°F water at 90°F ambient room temperature and 80°F inlet water temperature. Compressor motor operates on 115 Volt / 60 Hz single phase.



Member of  
U.S. Green  
Building  
Council



Recyclable  
Product



Water  
Conserving  
Product

Please visit [www.murdockmfg.com](http://www.murdockmfg.com)  
for most current specifications.



"INDOOR USE ONLY"

#### MODEL:

(Must Specify)

#### FLEXIBLE BUBBLER (LOW FLOW)

- ☐ A152208F-SO Bronze Finish
- ☐ A152308F-SO Gold Finish (High Polish)
- ☐ A152408F-SO Satin stainless Finish

#### LEAD-FREE STAINLESS STEEL BUBBLER

- ☐ A152208S-SO Bronze Finish
- ☐ A152308S-SO Gold Finish (High Polish)
- ☐ A152408S-SO Satin stainless Finish (Shown)

#### OPTIONS

(additional costs may be incurred)

- ☐ -HP High polished stainless steel
- ☐ -RBL Reverse bi-level
- ☐ -SK4 Skirt kit, stainless steel, for upper unit
- ☐ -WF1 1500 gallon capacity, NSF 42+53, 1 micron lead reduction filter
- ☐ -220V 220 volt / 50 Hz compressor (C€)

Complies  
with the  
following  
standards:



Test rating conditions are  
compliant with ARI 1010.

**MURDOCK MFG.** • 15125 Proctor Avenue • City of Industry, CA 91746 USA  
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • [www.murdockmfg.com](http://www.murdockmfg.com)




Member of  
MORRIS GROUP  
INTERNATIONAL



# ELECTRIC DRINKING FOUNTAIN

All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit [www.Murdockmfg.com](http://www.Murdockmfg.com) for most current specifications.

## A152.8-SO Series MODEL A152408S-SO BARRIER FREE, BI-LEVEL, SENSOR OPERATED WALL MOUNTED DRINKING FOUNTAIN WITH 32" TRIM PANEL

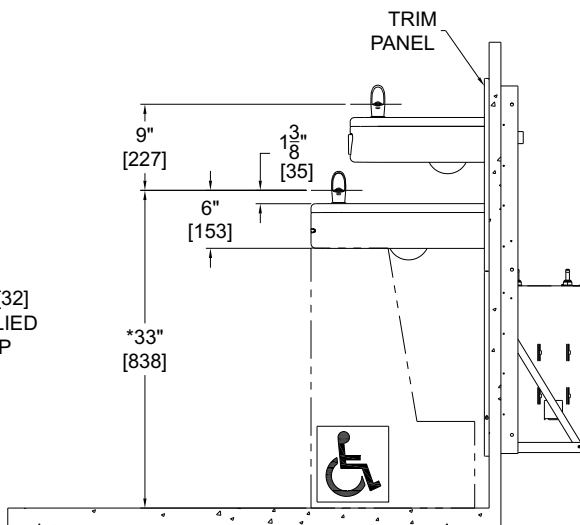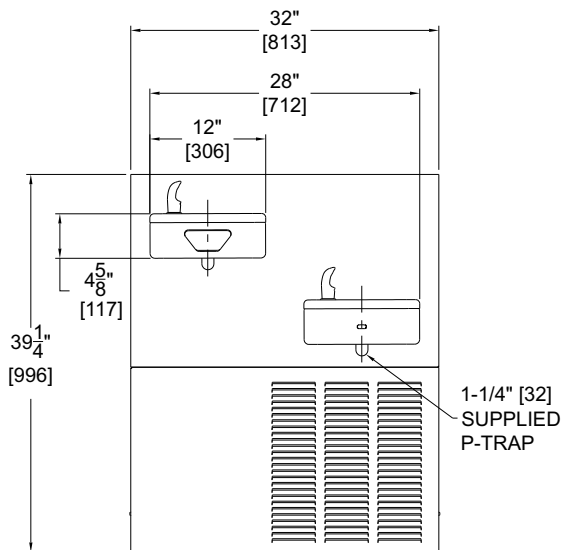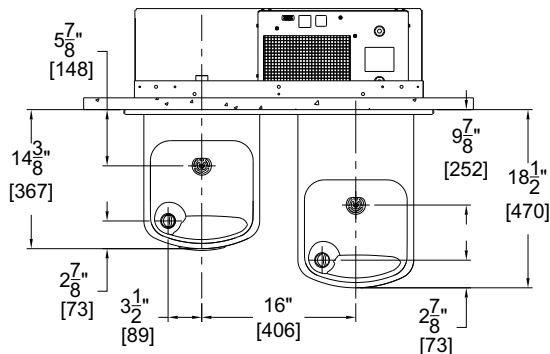

### GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM].
- \*2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES.
3. WATER LINE FROM CHILLER TO FOUNTAIN SHOULD BE COVERED WITH SPONGE FOAM RUBBER OR ICE WATER TYPE INSULATION OF ADEQUATE THICKNESS.

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

### SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.

**MURDOCK MFG.** • 15125 Proctor Avenue • City of Industry, CA 91746 USA  
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • [www.murdockmfg.com](http://www.murdockmfg.com)

Member of  
**MORRIS GROUP**  
INTERNATIONAL