

BOTTLE FILLER

BF3 Series

MODEL A000000-BF3

SEMI-RECESSED PUSHBUTTON OPERATED **BOTTLE FILLER**

STANDARD FEATURES

- 100 mesh inlet strainer
- Laminar Flow Water Supply
- 1 G.P.M. Fill Rate
- Lead Free
- Hinged Door
- Key Latch
- Meets ADA Forward and Side Reach Requirements
- Ligature-Resistant Design
- Vandal-Resistant Design



"INDOOR USE ONLY"

SUGGESTED SPECIFICATIONS

Model A0000000-BF3 is Semi-Recessed and pushbutton operated bottle filler. Bottle Filler can be mounted in a 4" or larger wall space for simple installation virtually anywhere. Housing has a slim and trim look that blends into your environment. Unit also has a strong, ligature resistant, and vandal-resistant design for years of trouble-free service. When installed properly, the bottle filler complies with ADA forward and side reach requirements. Bottle filler is fabricated of type 304 stainless steel polished to a satin finish. Unit is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9.

MODEL:

(Must Specify)

□ -BF3

18 Gage 304 Stainless Steel

OPTIONS

(additional costs may be incurred)

☐ -CG1 **Custom Graphics**

☐-EG Enviro-Glaze Specify Color:

1500 gallon capacity, NSF 42+53, ☐ -WF1

1 micron lead reduction water filter





Recyclable



Please visit www.murdockmfa.com for most current specifications.














09/07/16



BOTTLE FILLER

All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.Murdockmfg.com for most current specifications.





BF3 Series

MODEL A0000000-BF3

SEMI-RECESSED PUSHBUTTON OPERATED BOTTLE FILLER

TOP VIEW



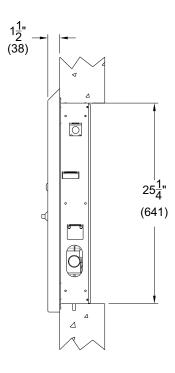

FRONT VIEW

SIDE VIEW

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES (MM).

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

MMARY FOR RING	Model Number & Options	_Quantity	All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock
SALS	Company		assumes no responsibility for use of void or superseded data. Dimensions
ECTION S APPROV ANUFAC	Contact	_Title	may change with the addition of optional accessories. Murdock Mfg.™,
SELEC & AP MAN	Signature (Approval for Manufacturing)	Date	Member of Morris Group International™. Please visit www.murdockmfg.com for most
	wandacturing)	Date	current specifications.

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP

A0.BF3 09/07/16