




HYDRANTS

FREEZELESS SILLCOCK

FUNCTION: For installation in interior or exterior building walls where an exposed hose connection is acceptable. Self-Draining feature provides positive non-freeze protection and integral vacuum breaker provides backflow protection.

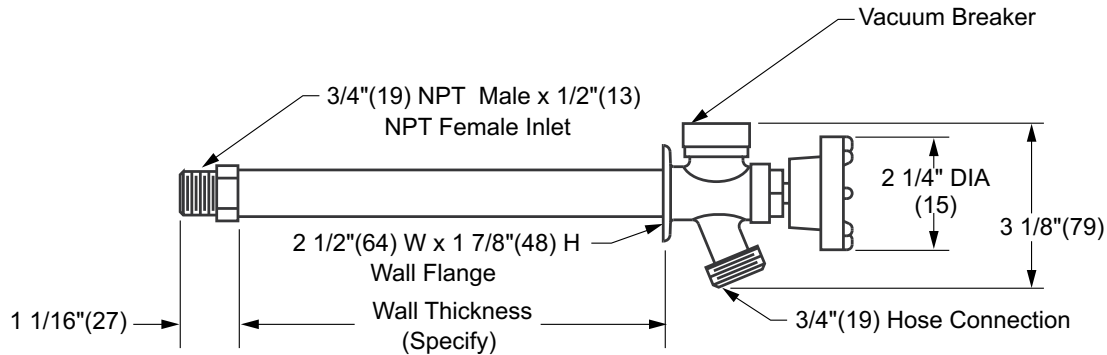

<input type="checkbox"/>	Fig. M3630-04(100) Wall Thickness
<input type="checkbox"/>	Fig. M3630-06(150) Wall Thickness
<input type="checkbox"/>	Fig. M3630-08(205) Wall Thickness
<input type="checkbox"/>	Fig. M3630-10(255) Wall Thickness
<input type="checkbox"/>	Fig. M3630-12(305) Wall Thickness

NOTES:

1. Recommended wall opening 1 1/4" (32). Hydrant shall be installed in horizontal position only with hose connection pointing down.
2. When ordering, specify wall thickness in 02" (51) increments as follows: 04(100), 06(150), 08(205), 10(255) or 12 (305).
3. All hydrants are manufactured with "NO-LEAD" brazing rings and USDA approved lubricants.
4. The AB1953, California Lead Law and NSF/ANSI Standard 61-2008 - Drinking Water Components are not applicable to hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
5. Dimensions shown in parentheses are in millimeters.
6. For refrigeration purposes only.

REGULARLY FURNISHED:

Rough Bronze Chrome Plated Non-Freeze
Hydrant with Integral Wall Flange and
Vacuum Breaker, Wheel Handle and 3/4"(19)
Hose Connection.

Please visit www.murdockmfg.com
for most current specifications.



Member of
U.S. Green
Building
Council



Recyclable
Product

Certified
by:



MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL