



# HYDRANTS

## M-3903 NON-FREEZE SANITARY ROOF HYDRANT

**FUNCTION:** Used on roofs where water is required for window washing, cleaning of condenser coils, cooling towers and other types of roof equipment. Freezing is prevented by the valve housing being located below the roof in a heated or insulated area. The hydrant is engineered to be fully self contained by draining the water from the casing after shut-off into the sealed canister.

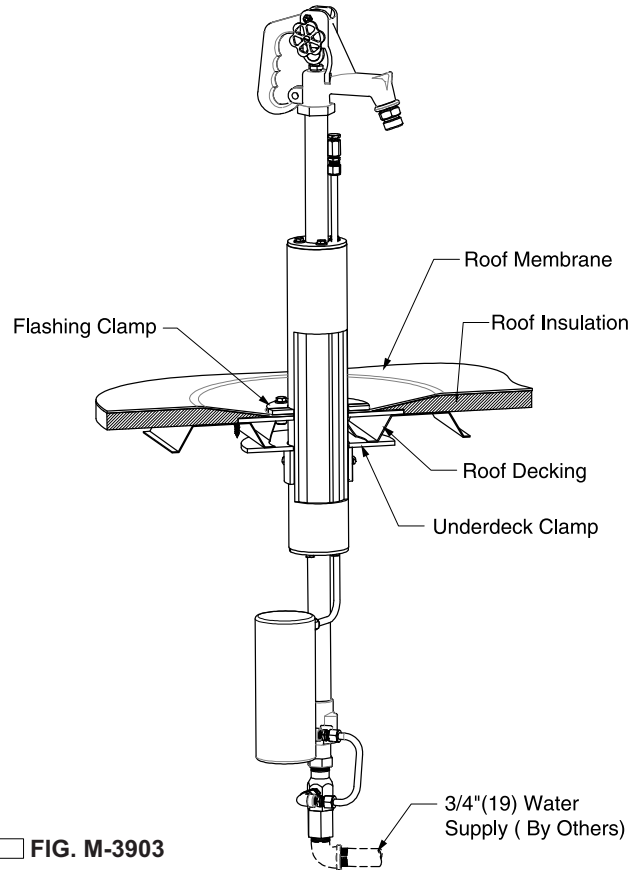
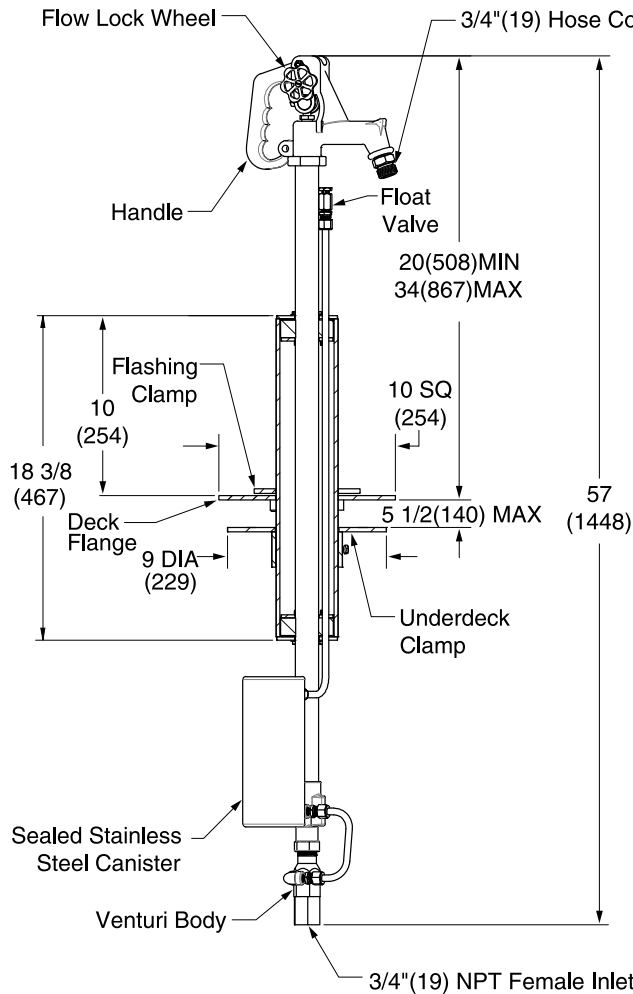


FIG. M-3903

Installation Illustration  
(For Illustration Purpose Only)

### REGULARLY FURNISHED:

Non-Freeze Sanitary (Self Contained) Roof Hydrant with Galvanized Casing, Adjustable Flow Wheel Lock Handle, Sealed Stainless Steel Canister, Venturi and Roof Mount Assembly.

### VARIATIONS:

☐ Vacuum Breaker -H

### NOTES:


1. Addition of vacuum breaker will not allow draining of the hydrant casing. Murdock-Super Secur is not responsible for any casings that burst or related incidents if the hydrant is supplied with a vacuum breaker.
2. The California Lead Laws and NSF/ANSI Standards 61-2008 - Drinking Water System Components are not applicable to this hydrant as they are not intended to convey/dispense water for human consumption through drinking or cooking.
3. Do not leave hose attached in freezing temperatures as it may prevent drainage of the casing.
4. Dimensions shown in parentheses are in millimeters.
5. FOR IRRIGATION PURPOSES ONLY.

Please visit [www.murdockmfg.com](http://www.murdockmfg.com)  
for most current specifications.

**MURDOCK MFG.** • 15125 Proctor Avenue • City of Industry, CA 91746 USA  
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • [www.murdockmfg.com](http://www.murdockmfg.com)

Member of  
**MORRIS GROUP**  
INTERNATIONAL


## NON-FREEZE SANITARY ROOF HYDRANT

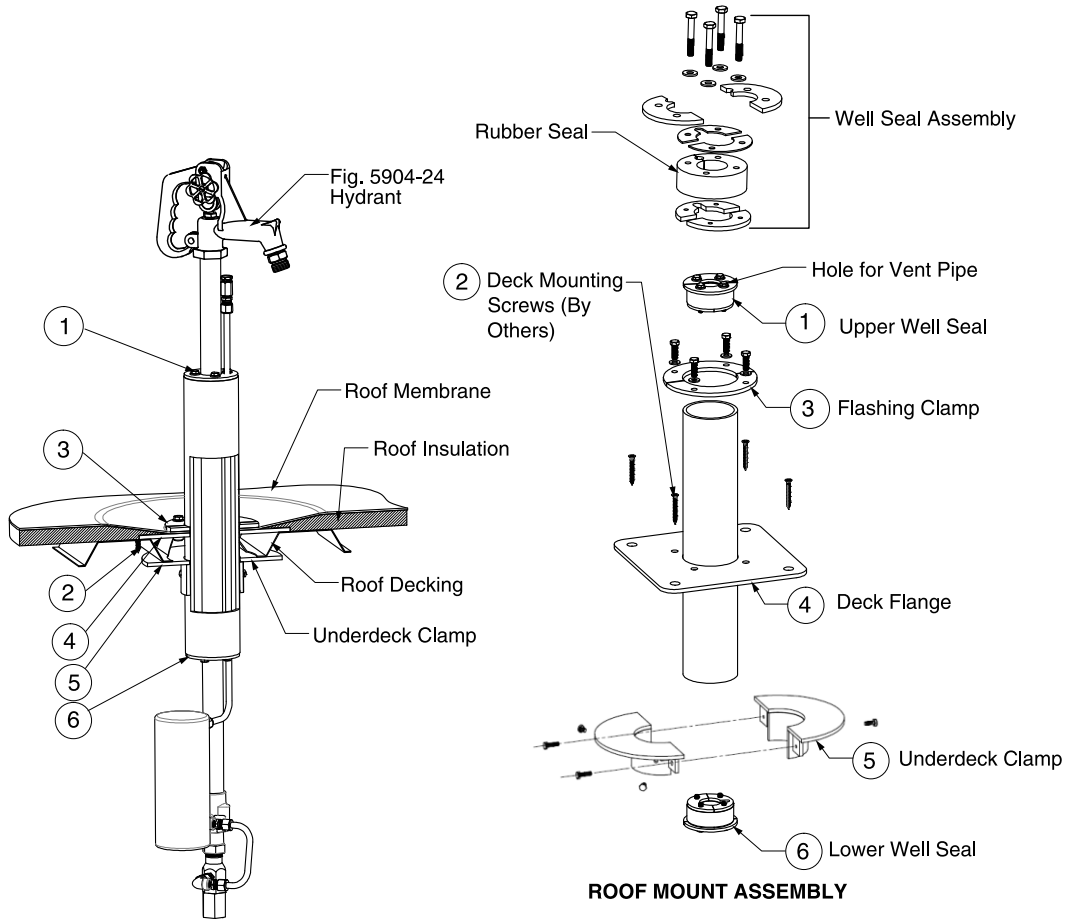

**Installation Illustration**  
(For Illustration Purpose Only)

**NOTE:** Fig. M-3903 hydrant is composed of a M-3904-02 hydrant and roof mount assembly. For hydrant parts information reference the M-3904 submittal.

### ROOF MOUNT ASSEMBLY

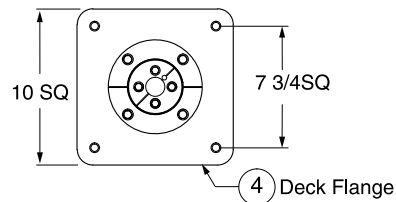

**ONE YEAR LIMITED WARRANTY** - Parts are warranted for one (1) year from date of shipment.

### SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit [www.Murdockmfg.com](http://www.Murdockmfg.com) for most current specifications.

Model Numbers & Options \_\_\_\_\_ Quantity \_\_\_\_\_  
 Company \_\_\_\_\_ Date \_\_\_\_\_  
 Contact \_\_\_\_\_ Title \_\_\_\_\_  
 Approval for Manufacturing/Signature \_\_\_\_\_