




HYDRANTS

M-3907 NON-FREEZE ROOF HYDRANT


FUNCTION: Provides water availability for window washing, cleaning of condenser coils, cooling towers and other types of roof equipment. Valve body of hydrants are drilled and tapped with 1/8" drain hole which must be piped to a drain location. The check valve prevents backflow due to low head-pressure.

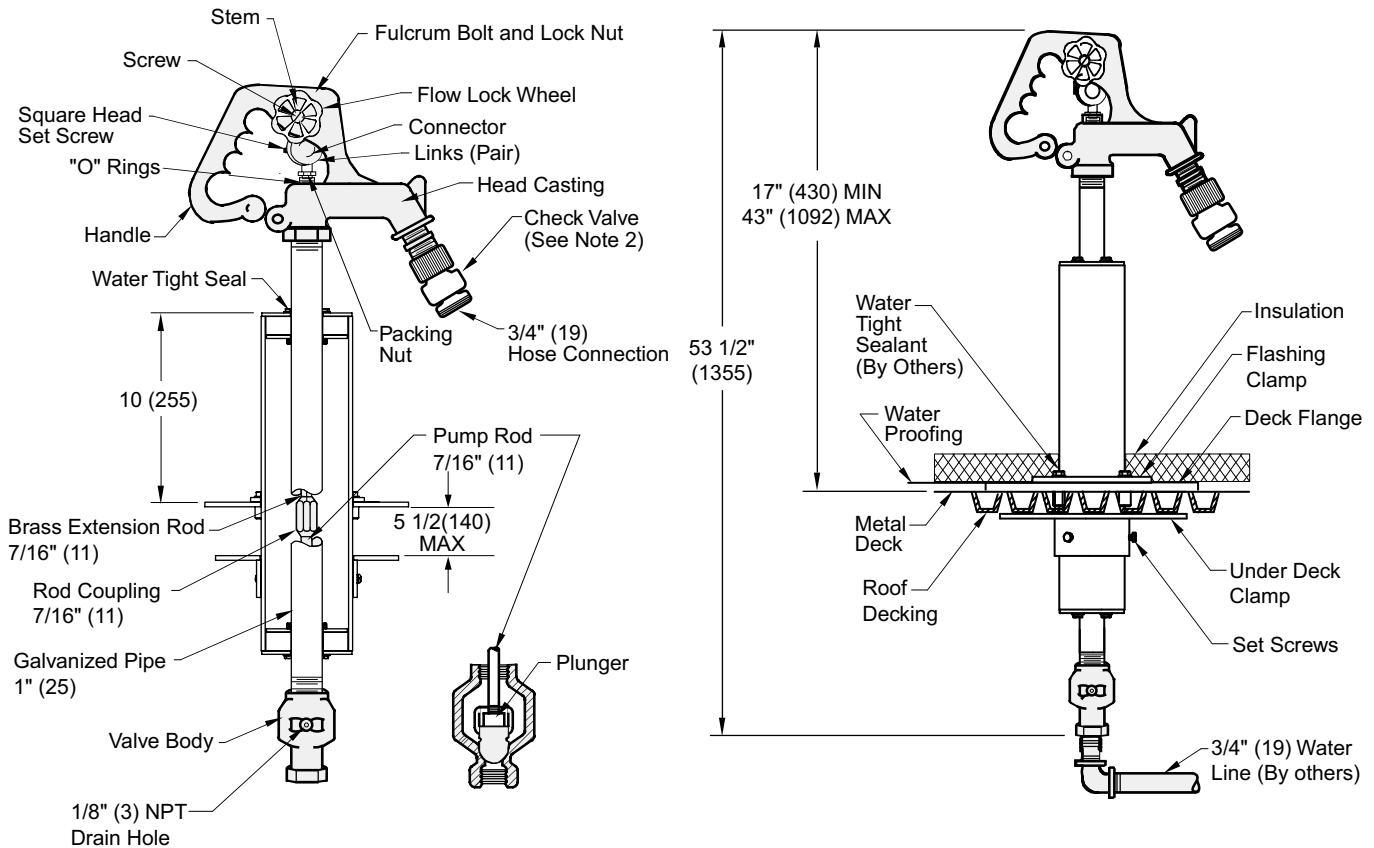

- NOTE:**
1. Drain Hole must be piped and discharged to an acceptable discharge point. Failure to do so will result in potential water damage for which Murdock is not responsible.
 2. Hose must be removed to allow proper draining of the casing. Murdock Super Secur is not responsible for any casing that burst or related incidents if the hose is not removed.
 3. The AB1953, California Lead Law, and NSF/ANSI Standard 61-2008 - Drinking Water System Components are not applicable to these hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
 4. Dimensions shown in parentheses are in millimeters.
 5. FOR IRRIGATION PURPOSES ONLY.

REGULARLY FURNISHED:

Non-Freeze Roof Hydrant with Check Valve, Galvanized Casing and Adjustable Flow Wheel Lock Handle with Deck Flange and Under Deck Clamp.

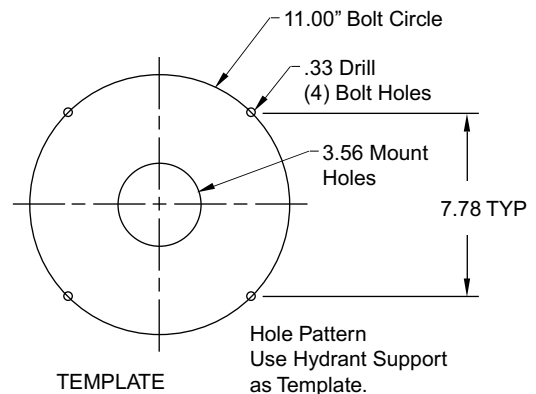

Please visit www.murdockmfg.com for most current specifications.



Member of
U.S. Green
Building
Council



Recyclable
Product



MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL

Rev. 04/10/14