


NON-FREEZE POST HYDRANT

FUNCTION: Used where an above ground water outlet is required in areas which are subject to freezing temperatures. Freezing is prevented by burying the valve housing below the frost line and draining water from the casing after shut-off.

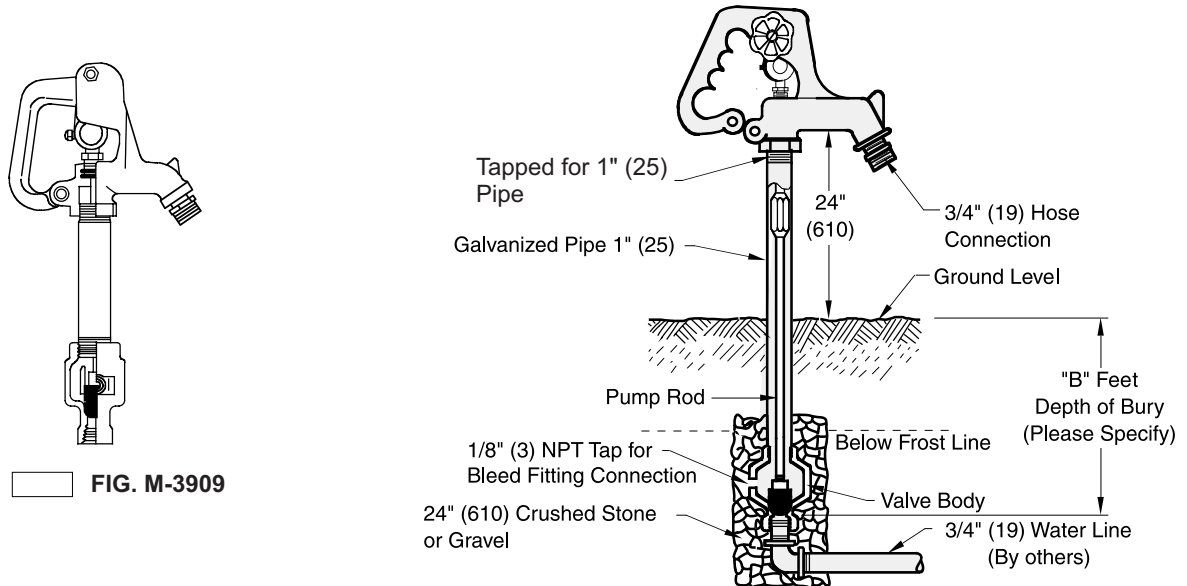


B (Depth of Bury) = 02(610), 03(915), 04(1220), 05(1525) or 06(1830) Feet

REGULARLY FURNISHED:

Non-Freeze Post Hydrant with Galvanized Casing and Adjustable Flow Wheel Lock Handle.

VARIATIONS:

- ☐ Vacuum Breaker -H
- ☐ 1"(25) Hose Connection -HC1
- ☐ 1"(25) Female Inlet Connection -MF-1

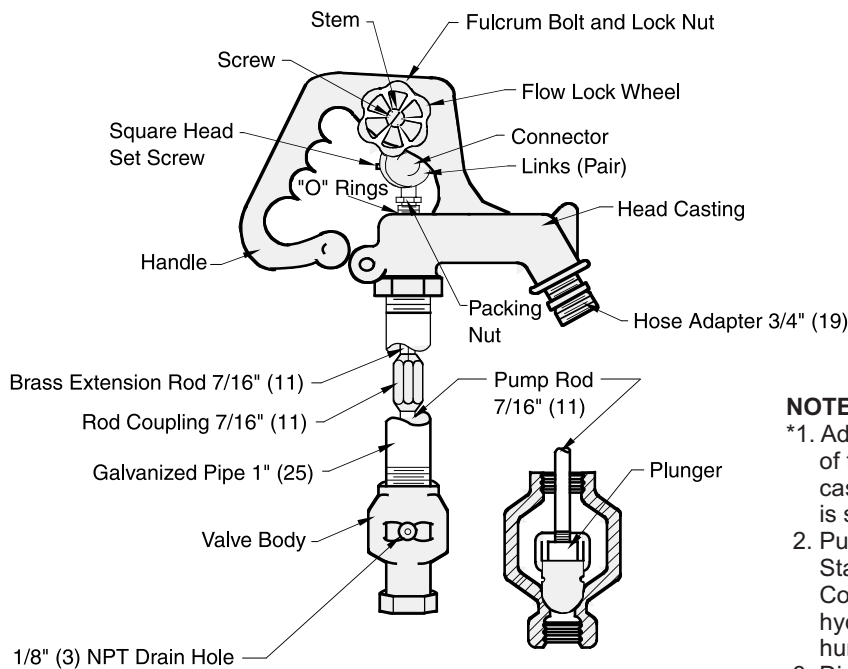

NOTE:

- *1. Addition of vacuum breaker will not allow draining of the casing. Murdock Mfg. is not responsible for any casings that burst or related incidents if the hydrant is supplied with a vacuum breaker.
2. Public Law 111-380, and NSF/ANSI Standard 61-2008 - Drinking Water System Components are not applicable to Murdock Mfg. hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
3. Dimensions shown in parentheses are in millimeters.
4. FOR IRRIGATION PURPOSES ONLY.

Please visit www.murdockmfg.com for most current specifications.