

# **CONTEMPORARY DRINKING FOUNTAINS**

## **GU Series**

**MODEL GUF99** 

PEDESTAL MOUNTED DRINKING FOUNTAIN

#### STANDARD FEATURES

- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Reinforced concrete with aggregate finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer



### SUGGESTED SPECIFICATIONS

Model GUF99 is a pedestal mounted, vandal resistant round drinking fountain made from an 18 gage, 304 stainless steel bowl mounted into a reinforced brown concrete aggregate pedestal. Unit shall be activated by a front mounted self-closing button, by using less than 5 pounds of force, which activates an internally mounted valve with an adjustable stream regulator controlling the water flow. Bubbler shall be polished stainless steel with a non-squirt feature and operate on water pressure range of 20-105 psig. Unit shall adhere to NSF/ANSI 61, Section 9, Public Law 111-380(NO-LEAD), and CHSC 116875.

Recyclable

Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

#### MODEL: (Must Specify)

☐ GUF98 Tan Concrete Aggregate

☐ GUF99 Brown Concrete Aggregate (Shown)

#### **OPTIONS**

(additional costs may be incurred)

- ☐ -CH30 Child height, 30" bubbler height
- ☐ -FRU1 Freeze resistant, 1 valve ¹
- -FRU2 Freeze resistant, 2 valves 1
- -FRU3 Freeze resistant, 3 valves 1
- ☐-FS Foot spray
- □ -HB1 Hose bibb, compression, with hose threaded outlet/VB 1 2
- Hose bibb, loose key, with hose threaded outlet/VB 12 ☐ -HB2 ☐ -HB4
  - Hose bibb, loose key, recessed vandal resistant, with hose threaded outlet/VB 12
- ☐ -IGM In-ground 14" mounting
- Jug filler, spigot, self-closing valve with plain end 12 ☐ -JF1
- ☐ -JF2 Jug filler, pushbutton, self-closing valve with plain end 1
- □ -NP1 Non-pollutable, freeze resistant, 1 valve
- □ -NP2 Non-pollutable, freeze resistant, 2 valves
- □ -NP3 Non-pollutable, freeze resistant, 3 valves
- □-PF Pet fountain
- Round concrete step for pedestal fountain □ -RCS

### Options Notes:

See separate option sheet.

<sup>2</sup> This option is not available freeze-resistant.

Complies with the following standards











MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA

Member of MORRIS GROUP


GUF99 01/18/16



## **CONTEMPORARY DRINKING FOUNTAINS**

All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.Murdockmfg.com for most current specifications.

GU Series

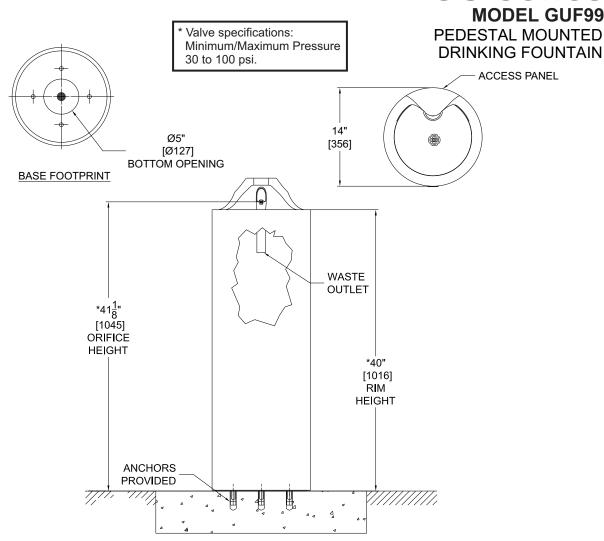

#### **GENERAL NOTES:**

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- \*2. STANDARD ADULT HEIGHT MODEL SHOWN. OPTIONAL -CH30 CHILD HEIGHT MODEL AVAILABLE.
- 3. STOP VALVE NOT PROVIDED.

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

MMARY FOR RING	Model Number & Options	_Quantity	All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock
N SUI OVAL ACTUI	Company		assumes no responsibility for use of void or superseded data. Dimensions
ECTION S APPROV ANUFAC	Contact	_Title	may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group
SELE & A MA	Signature (Approval for Manufacturing)		International™. Please visit www.murdockmfg.com for most current specifications.

**MURDOCK MFG.** • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP

**GUF99** 01/18/16