

CONTEMPORARY DRINKING FOUNTAINS

GV Series

MODEL GVF19-FRU1 FREEZE RESISTANT, PEDESTAL MOUNTED DRINKING FOUNTAIN

STANDARD FEATURES

- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Reinforced concrete with aggregate finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Access door, heavy duty steel, vandal resistant
- Freeze resistant valve system



MODEL:

(Must Specify)

☐ GVF18-FRU1 Tan Concrete Aggregate

☐ GVF19-FRU1 Brown Concrete Aggregate (Shown)

OPTIONS

(additional costs may be incurred)

□ -CH30 Child height, 30" bubbler height In-ground 14" mounting 🔲 -IGM

☐ -JFFR1 Jug filler, recessed, freeze resistant, plain end with self-closing valve

-PF Pet fountain receptor

[If added, model requires -FRU2]

Square concrete step for pedestal fountain □ -SCS

SUGGESTED SPECIFICATIONS

Model GVF19-FRU1 is a pedestal mounted, vandal resistant and freeze resistant square drinking fountain made from an 18 gage, 304 stainless steel bowl mounted into a reinforced brown concrete aggregate pedestal. Unit shall be activated by a front mounted push button, by using less than 5 pounds of force, which pneumatically activates a water valve mounted below the frost line. An internally mounted adjustable stream regulator shall control the water flow. Bubbler shall be poilshed stainless steel with a non-squirt feature and operate on water pressure range of 20-105 psig. Unit shall adhere to NSF/ANSI 61, Section 9, Public Law 111-380(NO-LEAD), and CHSC 116875.



Recyclable



Please visit www.murdockmfa.com for most current specifications.

Complies with the following












CONTEMPORARY DRINKING FOUNTAINS

All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.Murdockmfg.com for most current specifications.

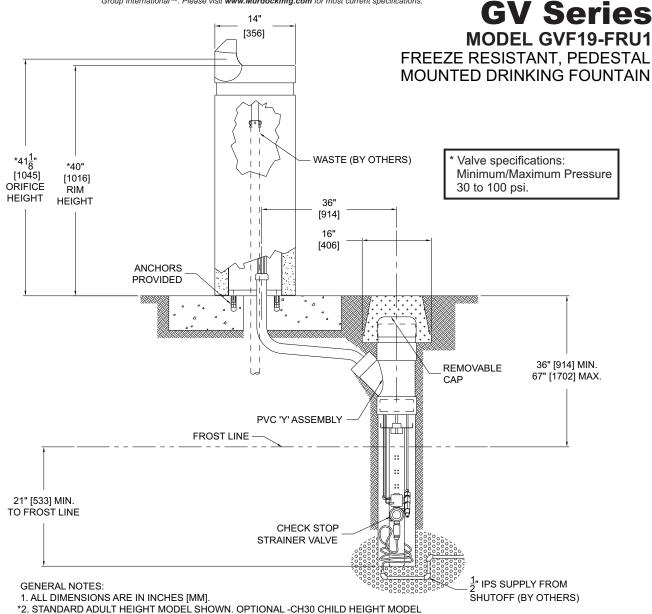

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

MMARY FOR SING	Model Number & Options_	_Quantity	All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to
SELECTION SUMMA & APPROVAL FOR MANUFACTURING	Company		change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of
CTIO	Contact	Title	optional accessories. Murdock Mfg.™, Member of Morris Group
SELE & A MA	Signature (Approval for Manufacturing)		International™. Please visit www.murdockmfg.com for most current specifications.

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP