

# **CONTEMPORARY DRINKING FOUNTAINS**

## **GV** Series **MODEL GVF19**

PEDESTAL MOUNTED DRINKING FOUNTAIN

## STANDARD FEATURES

- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Reinforced concrete with aggregate finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Access door, heavy duty steel, vandal resistant

### SUGGESTED SPECIFICATIONS

Model GVF19 is a pedestal mounted, vandal resistant square drinking fountain made from an 18 gage, 304 stainless steel bowl mounted into a reinforced brown concrete aggregate pedestal. Unit shall be activated by a front mounted self-closing button, by using less than 5 pounds of force, which activates an internally mounted valve with an adjustable stream regulator controlling the water flow. Bubbler shall be polished stainless steel with a non-squirt feature and operate on water pressure range of 20-105 psig. Unit shall adhere to NSF/ANSI 61, Section 9, Public Law 111-380(NO-LEAD), and CHSC 116875.



#### MODEL: (Must Specify)

<b>_</b> GVF18	Tan Concrete Aggregate

```
GVF19
 Brown Concrete Aggregate (Shown)
```

### **OPTIONS**

(additional costs may be incurred)

- -CH30 Child height, 30" bubbler height -FRU1 Freeze resistant, 1 valve 1
- -FRU2 Freeze resistant, 2 valves 1
- -FRU3 Freeze resistant, 3 valves 1
- 🗋 -FS Foot spray
- 🗋 -HB1 Hose bibb, compression, with hose threaded outlet/VB 1 2
- Hose bibb, loose key, with hose threaded outlet/VB <sup>1</sup> <sup>2</sup> -HB2
- Hose bibb, loose key, recessed vandal resistant, 🗋 -HB4 with hose threaded outlet/VB 12
- 🗋 -IGM In-ground 14" mounting
- Jug filler, spigot, self-closing valve with plain end 12 🗋 -JF1
- 🗋 -JF2 Jug filler, pushbutton, self-closing valve with plain end <sup>1</sup>
- 🗋 -NP1 Non-pollutable, freeze resistant, 1 valve
- -NP2 Non-pollutable, freeze resistant, 2 valves
- -NP3 Non-pollutable, freeze resistant, 3 valves
- 🗋 -PF Pet fountain
- Square concrete step for pedestal fountain
- **Options Notes:**
- See separate option sheet. <sup>2</sup> This option is not available freeze-resistant.





MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com Member of MORRIS GROUP




for most current specifications.



## **CONTEMPORARY DRINKING FOUNTAINS**

All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.Murdockmfg.com for most current specifications.

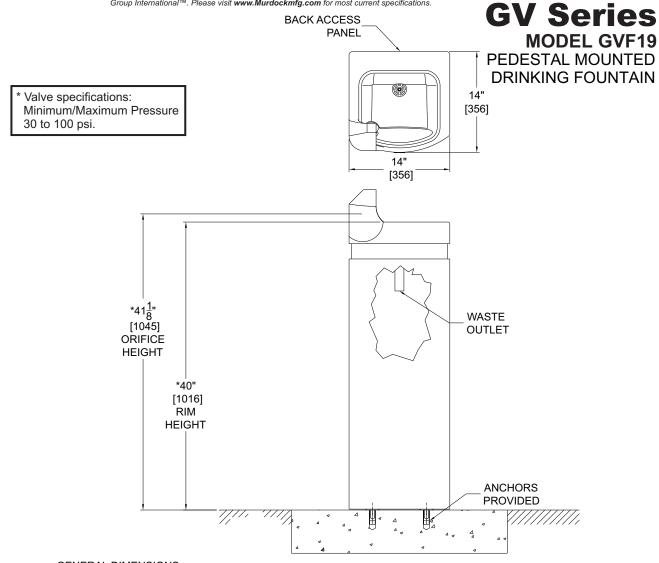

#### GENERAL DIMENSIONS:

#### \*2. STANDARD ADULT HEIGHT MODEL SHOWN. OPTIONAL -CH30 HEIGHT MODEL AVAILABLE.

3. STOP VALVE NOT PROVIDED.

Murdock Mfg.<sup>TM</sup> warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock<sup>TM</sup> is notified in writing within one year from date of shipment, F.O.B. Industry, California.

MMARY - FOR RING	Model Number & Options_	Quantity	All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock		
SELECTION SUMMARY & APPROVAL FOR MANUFACTURING	Company	Title	assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group		
SELE & A MAI	Signature (Approval for Manufacturing)		International™. Please visit www.murdockmfg.com for most current specifications.		
MUDD	MURDACK NEC - 15125 Depeter Avenue - City of Industry CA 01746 USA				

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com