

CONTEMPORARY DRINKING FOUNTAINS

GV Series

MODEL GVQ89-FRU3 BARRIER FREE, TRI-LEVEL, FREEZE RESISTANT, PEDESTAL MOUNTED DRINKING FOUNTAIN

STANDARD FEATURES

- Both Child and Adult ADA Compliant (when properly installed)
- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- Reinforced concrete with aggregate finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- Access door, heavy duty steel, vandal resistant
- Vandal resistant galvanized steel bottom plate
- Freeze resistant valve system



Model GVQ89-FRU3 is a barrier free pedestal mounted, vandal resistant, freeze resistant tri-level square drinking fountain made from 18 gage, 304 stainless steel bowls mounted into a reinforced brown concrete aggregate pedestal. Unit shall be activated by front mounted push buttons, by using less than 5 pounds of force, which pneumatically activates water valves mounted below the frost line. Internally mounted adjustable stream regulators shall control the water flow. Bubblers shall be polished stainless steel with non-squirt features and operate on water pressure range of 20-105 psig. Fountain is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.



MODEL:

(Must Specify)

- ☐ GVQ88-FRU3 Tan Concrete Aggregate
- ☐ GVQ89-FRU3 Brown Concrete Aggregate (Shown)

OPTIONS

(additional costs may be incurred)

□ -FS Foot spray

[If added, model requires -FRU4]

In-ground 14" mounting □ -IGM

☐ -JFFR1 Jug filler, recessed, freeze resistant,

plain end with self-closing valve

-PF Pet fountain receptor

[If added, model requires -FRU4]

☐ -SCS Square concrete step



Building Council



Recyclable



Please visit www.murdockmfa.com for most current specifications.









Complies with the following standards:








CONTEMPORARY DRINKING FOUNTAINS

All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.Murdockmfg.com for most current specifications.

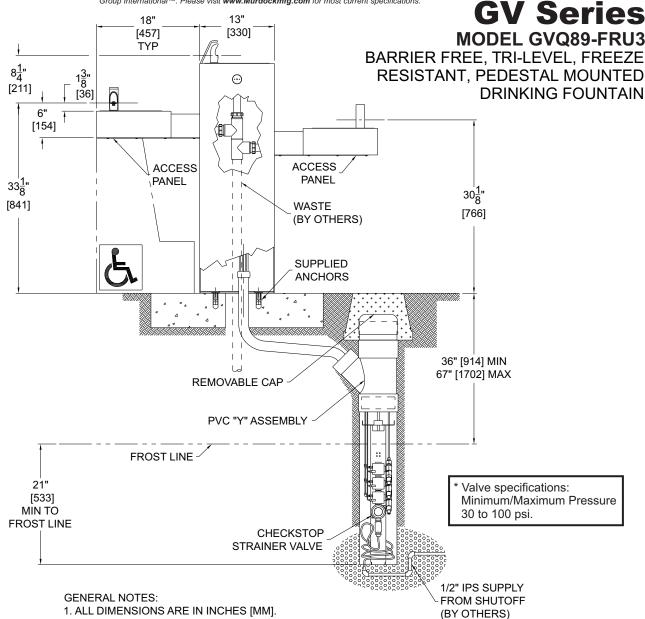

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SUMMARY AL FOR TURING	Model Number & Options	_Quantity	All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock
N SUI	Company		assumes no responsibility for use of void or superseded data. Dimensions
ECTION SU APPROVA ANUFACTI	Contact	Title	may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group
SELE & A MA	Signature (Approval for Manufacturing)		International™. Please visit www.murdockmfg.com for most current specifications.
			· · · · · · · · · · · · · · · · · · ·

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP