




# RESTROOM ACCESSORIES

## MURDOCK-SUPER SECUR RESTROOM ACCESSORIES

MODEL #  
1118 SERIES

HAND DRYER

ITEM	DESCRIPTION	QTY
1	ACTUATING PUSHBUTTON AND NOZZLE	1
2	MOUNTING HARDWARE (1 THREADED PIPE)	4
3	FLEX HOSE AND CABLES	1
4	BLOWER MOTOR ASSY.	1
5	ELECTRICAL ACCESS COVER	1

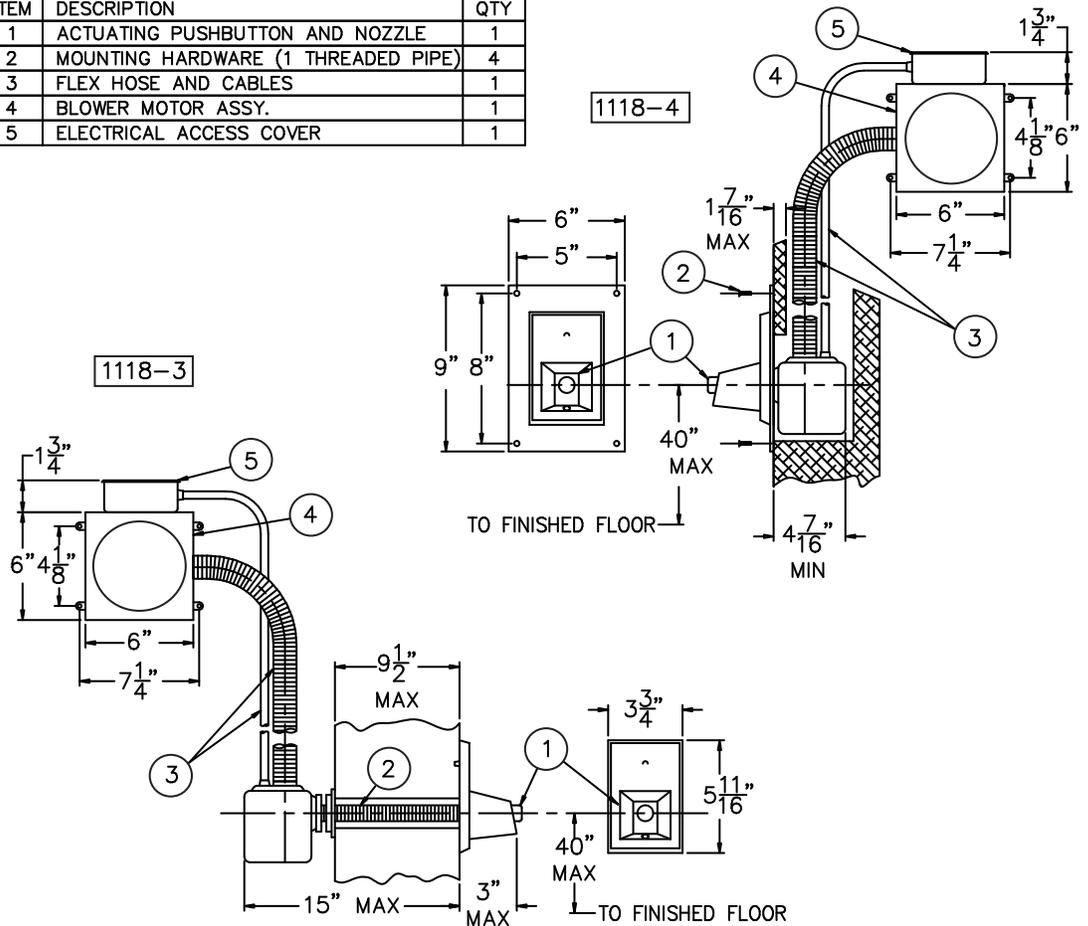

### TECHNICAL DATA:

**1118-3** semi-recessed electric hand dryer is Fastaire model HD-03. Vandal-resistant epoxy-coated cast aluminum nozzle with start button is in the restroom. Pushrod assembly will install in walls up to 9-1/2" thick. Switch box is mounted on pushrod assembly in plumbing chase. Blower unit and air duct are also mounted in plumbing chase.

**1118-4** is Fastaire model HD-04 and is similar to HD-03 but without pushrod assembly. Nozzle may be mounted from restroom side of wall.

**High velocity** air flow is timed for 30 seconds and dries hands without heating coils.

**Hand dryer** is listed by Underwriters Laboratories, Inc. Electrical characteristics are 120 Volts AC, 7 Amps, 60 Hz.

**Dryer** must be mounted with push button at a maximum of 40" above floor to comply with requirements of ADA.

**Fastaire** provides a 3 year warranty.

### MODEL NUMBER:

- 1118-3 Electric Hand Dryer, Semi-Recessed
- 1118-4 Electric Hand Dryer, Semi-Recessed

### SELECTION SUMMARY & APPROVAL FOR MANUFACTURING

All dimensions are nominal and subject to manufacturer's change without notice. Murdock-Super Secur assumes no responsibility for use of void or suspended data. © Copyright 2006, Murdock-Super Secur, a division of Acorn Engineering Company. Please visit [www.murdock-supersecur.com](http://www.murdock-supersecur.com) for most current specifications.

Model Numbers & Options \_\_\_\_\_ Quantity \_\_\_\_\_

Company \_\_\_\_\_ Date \_\_\_\_\_

Contact \_\_\_\_\_ Title \_\_\_\_\_

Approval for Manufacturing/Signature \_\_\_\_\_