

OUTDOOR SHOWERS

Shower Series

MODEL M-PCS14
ONE STATION POOL
AND BEACH SHOWER

STANDARD FEATURES

- Pushbutton requiring less than 5 pounds for activation
- Adjustable timing, from 5 to 60 seconds
- Chrome plated brass shower head with 2.5 gpm flow control and adjustable spray pattern
- Vandal resistant fasteners
- Shut off valve for easy servicing
- Heavy duty, 14 gage, 304 stainless steel construction with corrosion and scratch resistant satin finish


SUGGESTED SPECIFICATIONS

Column shower shall be Murdock model M-PCS14, single station shower. Unit is to be pre-piped and hydrostatically tested.

Valve shall have internally mounted metering valve, pushbutton operated and requiring less than 5 pounds of force to activate. Timing shall be adjusted from 5 to 60 seconds.

Shower head shall be chrome plated brass with 2.5 gpm flow restrictor and include an adjustable spray pattern from a coarse stream to a fine mist.

Unit shall be constructed of heavy duty 14 gage type 304 stainless steel polished to a satin finish with vandal resistant fasteners and shall include a 1/4" thick stainless steel bottom plate, providing secure mounting for shower.

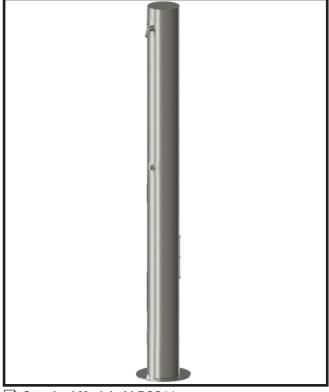

Standard Model: M-PCS14

MODEL:

(Must Specify)

☐ M-PCS14 Satin Stainless Finish (Shown)
☐ M-PCS15 Green Powder-Coated

Custom color finishes available upon request

☐ M-PCS16 Red Powder-Coated Blue Powder-Coated

OPTIONS

(additional costs may be incurred)

☐ - FRU1 Underground freeze-resistant valve for one pushbutton ¹

☐ - FRU2 Underground freeze-resistant valve for two

pushbuttons ¹

☐ - FS Foot Shower at one station ¹

Grab bar - Two vertical grab bars and second

lower shower head at 48" 1

In-ground anchor plate (replaces standard)

anchor plate)1

LOGO Customer specified logo ¹

Options Notes:

¹ See separate option sheet.



Member of U.S. Green Building Council

Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com




Complies with the following standards:







Please visit www.murdockmfg.com for most current specifications.



Member of Morris Group

M-PCS14 08/28/14



OUTDOOR SHOWERS

All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.Murdockmfg.com for most current specifications.

Shower Series MODEL M-PCS14 [181] ONE STATION POOL AND BEACH SHOWER **UPPER SHOWER** HEAD **PUSHBUTTON FOR UPPER SHOWER HEAD** · @ · 84" [2134] 78" [1981] ACCESS PANEL 48" [1219] ACCESS PANEL O-RING CONNECTION **STANDARD** TO SHOWER PIPING **ANCHOR PLATE** 3/4" NPTF INLET CONNECTION Δ 1 **GENERAL NOTES:** 1. ALL DIMENSIONS ARE IN INCHES [MM].

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

MMARY FOR SING	Model Number & Options_	_Quantity	All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to
SELECTION SUMMA & APPROVAL FOR MANUFACTURING	Company		change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of
CTIO	Contact	Title	optional accessories. Murdock Mfg.™, Member of Morris Group
SELE & A MA	Signature (Approval for Manufacturing)		International™. Please visit www.murdockmfg.com for most current specifications.

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of MORRIS GROUP