



# WATER COOLERS

## A611.8 Series

### MODEL A611108F

FREE STANDING  
WATER COOLER

#### STANDARD FEATURES

- Granite powder coated cabinet
- Flexible, anti-rotation, non-squirt bubbler
- 100 mesh inlet strainer
- Vandal resistant screws
- Hanger bracket provided

#### SUGGESTED SPECIFICATIONS

Model A611108F is a self-contained, pressurized water cooler that shall deliver a minimum of **8.0 GPH** (30.3 LPH) of water at 50°F (10°C) cooled from 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient. Unit shall be activated by a self-closing pushbutton which activates an internally mounted valve with an adjustable stream regulator controlling the water flow. Bubbler shall deliver a 0.3 GPM flow, have a flexible guard with an integrally designed non-squirt feature and operate on a water pressure range of 20-105 psig. Basin shall be constructed from 304 stainless steel and have an integral drain. Cabinet shall be either galvanized steel with granite powder coat or stainless steel. Cooling system shall use R-134a refrigerant and be capillary tube regulated. An adjustable thermostat with an off position shall regulate the refrigeration system. Unit shall be listed by Underwriters Laboratories for both the US and Canada and is compliant to the Air Conditioning and Refrigeration Institute Standard 1010. Unit is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.

Model Number	GPH*	Rated Watts	Full Load Amps	Approx. Shipping Weight
A611108F	8.0	400	4.8	70 lbs.

\* GPH of 50°F water at 90°F ambient room temperature and 80°F inlet water temperature  
Compressor motor operates on 115 Volt / 60 Hz single phase.



Member of  
U.S. Green  
Building  
Council



Recyclable  
Product



Water  
Conserving  
Product

Please visit [www.murdockmfg.com](http://www.murdockmfg.com)  
for most current specifications.



Model A611108F Shown

**"INDOOR USE ONLY"**

#### MODEL:

(Must Specify)

##### FLEXIBLE BUBBLER (LOW FLOW)

- ☐ A611108F Granite Finish (Shown)
- ☐ A611408F Satin Stainless Finish

##### LEAD-FREE STAINLESS STEEL PUSHBUTTON

- ☐ A611108Q Granite Finish
- ☐ A611408Q Satin Stainless Finish

##### LEAD-FREE STAINLESS STEEL BUBBLER

- ☐ A611108S Granite Finish
- ☐ A611408S Satin Stainless Finish

#### OPTIONS

(additional costs may be incurred)

- ☐ -EB4 Enclosed back
- ☐ -FPO Foot pedal
- ☐ -GF1 Glass filler
- ☐ -HGF Hot water glass filler
- ☐ -WF1 1500 gallon capacity, NSF 42+53,  
1 micron lead reduction filter
- ☐ -220V 220 volt / 50 Hz compressor

Complies  
with the  
following  
standards:



NSF/ANSI 61



GREEN  
UPC



Federal  
Public Law  
111-380  
(No Lead)



(220V Compressor Only)



Test rating conditions are  
compliant with ARI 1010.



**MURDOCK MFG.** • 15125 Proctor Avenue • City of Industry, CA 91746 USA  
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • [www.murdockmfg.com](http://www.murdockmfg.com)

Member of  
MORRIS GROUP  
INTERNATIONAL





# WATER COOLERS

All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit [www.Murdockmfg.com](http://www.Murdockmfg.com) for most current specifications.

## A611.8 Series

### MODEL A611108F

FREE STANDING  
WATER COOLER

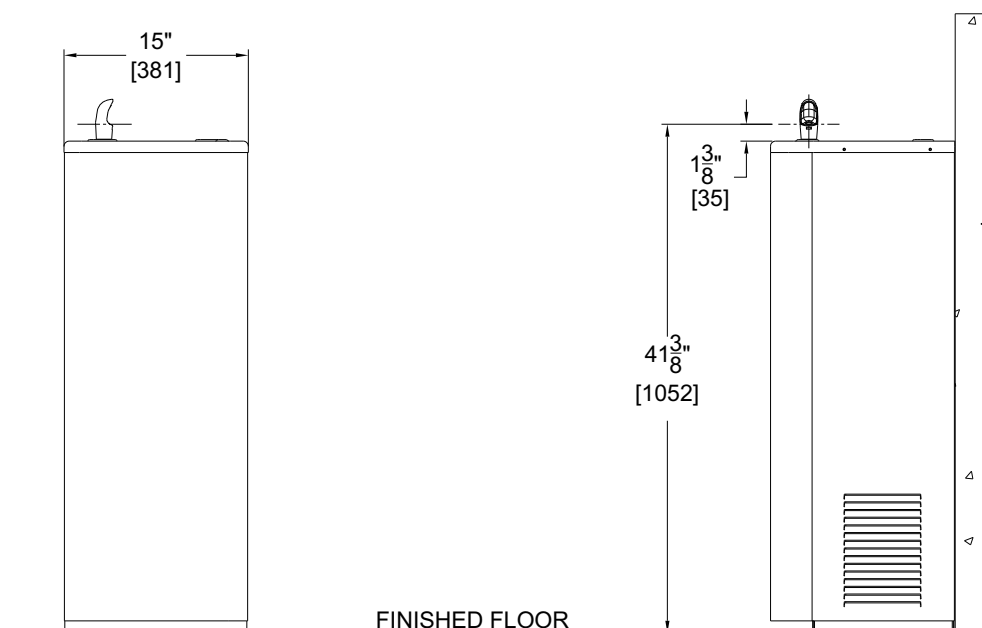

#### GENERAL NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MM]
2. ALLOW 4 INCHES [102 MM] MINIMUM CLEARANCE PER LEFT AND RIGHT SIDE FOR VENTILATION
3. STOP VALVE, P-TRAP, & ELECTRICAL OUTLET NOT SUPPLIED.

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY  
& APPROVAL FOR  
MANUFACTURING

Model Number & Options _____	Quantity _____
Company _____	
Contact _____	Title _____
Signature (Approval for Manufacturing) _____	Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit [www.murdockmfg.com](http://www.murdockmfg.com) for most current specifications.

**MURDOCK MFG.** • 15125 Proctor Avenue • City of Industry, CA 91746 USA  
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • [www.murdockmfg.com](http://www.murdockmfg.com)

Member of  
**MORRIS GROUP**  
INTERNATIONAL