

- Material will be high quality 100% recycled grey iron; ASTM A48 class 35b or better; hardness 170-223 brinnell (unless specified otherwise; see below).

- Grey iron ASTM A48 (standard)

- ❑ Grey iron ASTM A48 (standard)
- ❑ Aluminum, ASTM B26
- ❑ Ductile iron, (required for all load ratings higher than pedestrian) ASTM A536 class 65-45-12.
- ❑ Nickel bronze (ASTM B30)
- ❑ Bronze (ASTM B26)

Finish:

- ☐ Raw (standard)
- ☐ Rust conditioner
- ☐ Polyester Powder Coat*
- ☐ Liquid Coat (wet paint)*


*Please specify standard UA color

- or mfr. name and color code.
- ☐ Brush (bronze/nickel/aluminum only)
- ☐ Polish (bronze/nickel/aluminum only)
- ☐ Galvanized (grey iron and ductile iron only)

Notes

- 1) Cast in two pieces.
- 2) Gate is 1 ¼" thick at edge.
- 3) Center opening expansion at 1"-10".
- 4) No openings greater than ¾", in conformance with ADA Accessibility Guidelines.
- 5) Gate weighs 203 lbs.

Plan

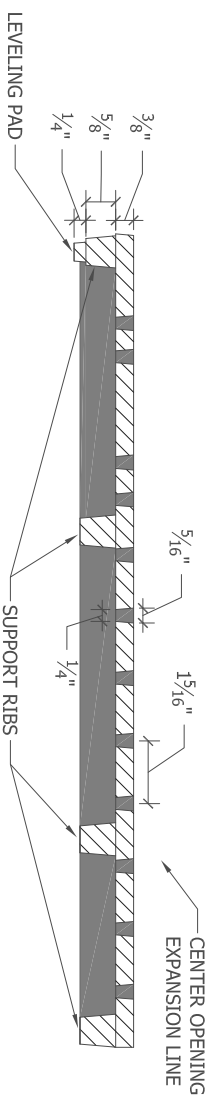

4' Combo Chinook

**URBAN
NARRATIVES**
Founded 1972